

Advantages

- Easy and quick to apply.
- Excellent acoustic performance.
- Applied as a single layer treatment.
- Excellent fire resistance & temperature stability.
- Highly durable.
- Low thermal conductivity.
- Lead sheet mass barrier for high performance.

Applications

Wilhams WIL-LAG Original is a highly efficient acoustic insulation lagging for ductwork, pipes, machine coverings, partition infill, suspended ceilings and where considerable reduction in the passage of noise is required.

Description

Wilhams WIL-LAG Original is a flexible material consisting of a five part laminate, incorporating a scrim backed acoustic spacer layer, a heavy lead mass barrier and an outer thermal insulating layer with vapour barrier meeting Class 'O' of the UK Building Regulations. Being of a laminated construction it overcomes the need for a separate isolation layer normally required beneath most forms of acoustic lagging.

Technical Information

Wilhams WIL-LAG Original conforms to the following specifications:

- Acoustic spacer Glass fibre 25mm thick
24-32 kg/m³ nominal density
White glass tissue backing
- Thermal spacer Glass fibre 25mm thick
24-32 kg/m³ nominal density
Class 'O' foil facing
- Service temperature -30 to 100°C
- Chemical resistance Oils, water, most solvents
- Fire resistance Class O Building Regulations
B2/3/4 App A, foil faced.
- Thermal Conductivity 0.037 W/m²K
to BS 4745 1990

Physical Information

DIMENSIONS

Standard sheet size: 2m x 1.2m


Other sizes are available upon request.

GRADES

Wilhams WIL-LAG Original is available in two grades to suit different performance requirements:

Grade	Lead Sheet (kg/m ²)	Thickness (mm)*
Original 5	5	50
Original 10	10	50

* Nominal thickness

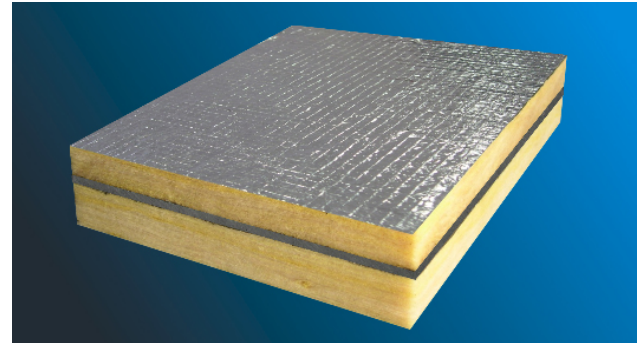

Acoustic Performance

Wilhams WIL-LAG Original is a high performance material that has been acoustically tested at certified independent test laboratories.

Tested and Rated according to:

ISO 140-3

BS 2750:Part3:1980


Sound Reduction Index (tabulated)

WIL-LAG Original only without any supporting materials

Material \ Frequency	63	125	250	500	1k	2k	4k	8k
Original 5	21	17	20	28	39	49	54	46
Original 10	26	24	28	35	38	47	57	51

Acoustic duct lagging is a complex subject with the size, shape, thickness and configuration of the ductwork all having a significant effect on the system performance. The data shown above and below is based on flat panel tests used for WIL-LAG Prime products. Similar tests carried out on ducting will generally produce improved levels of performance.

Sound Reduction Index

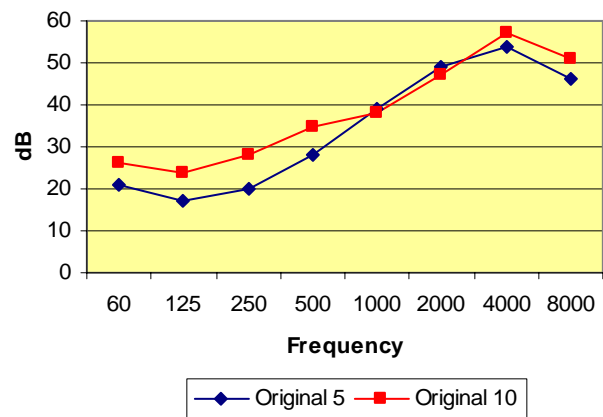

Wilhams Insulation Ltd

Units 1-3 Rye Industrial Park, Harbour Rd, Rye, East Sussex TN31 7TE United Kingdom
Export Sales:- Tel: +44 (0) 1797 226888 Fax: +44 (0) 1797 227322 Email: export@wilhams.co.uk
UK Sales:- Tel: +44 (0) 1206 765288 Fax: +44 (0) 1206 765289 Email: sales@wilhams.co.uk

© Copyright 2005 Wilhams Insulation Limited.

IMPORTANT NOTICE: Any directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product to be used is suitable for that purpose intended.

Selection Guidelines

Wilhams have recognised the complex problems associated with noise breakout from ductwork and have developed performance data from laboratory test results. This performance data predicts, as closely as possible, the minimum likely improvement achievable by lagging a duct with WIL-LAG Original insulating materials.

The data below is based on ductwork of 6m length and 1000 x 600mm cross section, and indicates the actual improvement of the WIL-LAG Original, with the noise reduction of the original untreated ductwork being removed from this performance data.

Material \ Frequency	63	125	250	500	1k	2k	4k
Original 5	4	8	12	24	30	35	34
Original10	7	10	19	30	37	42	41

To boost low frequency noise absorption, Wilhams WDS type damping sheet (see data sheet 3/01) should be applied to the ductwork before installing the WIL-LAG Original.

Installation Guidelines

The method required in the fitting of WIL-LAG Original insulation is dependent on several factors.

- 1) The size and circumference of the duct.
- 2) The shape of the duct -rectangular or round.
- 3) The ambient temperature and temperature within the duct – normal and maximum.
- 4) The location of the duct – inside or outside

Circular ductwork

Round ducts where one sheet of WIL-LAG Original will completely lap the circumference can be insulated without the need for adhesives or extra mechanical fixings. Mating edges are sealed with a foil faced adhesive tape to match the finish required.

The WIL-LAG Original insulation can be secured to large round ducts using proprietary banding systems, in conjunction with edge tape.

Rectangular ductwork

Rectangular ducts normally require additional support for the WIL-LAG Original in the form of contact adhesive and/or proprietary hangers, particularly on the underside where the WIL-LAG Original will tend to hang away from the duct surface.

It is recommended that large intricate ducts be further supported and reinforced with 25mm wire mesh (i.e. chicken wire) and wire ties.

Banding rectangular ductwork is not recommended as insufficient support is given across the sides of the duct and the WIL-LAG Original will be compressed at the corners, thus affecting performance.

Wilhams Insulation Ltd

Units 1-3 Rye Industrial Park, Harbour Rd, Rye, East Sussex TN31 7TE United Kingdom
Export Sales:- Tel: +44 (0) 1797 226888 Fax: +44 (0) 1797 227322 Email: export@wilhams.co.uk
UK Sales:- Tel: +44 (0) 1206 765288 Fax: +44 (0) 1206 765289 Email: sales@wilhams.co.uk
© Copyright 2005 Wilhams Insulation Limited.

IMPORTANT NOTICE: Any directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product to be used is suitable for that purpose intended.